


LENZ INDUSTRIAL LOW PRESSURE HOSE

Specify **LENZ**
**HOSE
FITTINGS**

INDUSTRIAL
LOW PRESSURE
RAYON BRAID HOSE
1 & 2 RAYON BRAID
RUBBER COVER

TYPE 1BSR • 1 RAYON BRAID HOSE


Lenz Type 1BSR, industrial low pressure hydraulic 1 Rayon Braid hose is a quality product of synthetic rubber tube and cover, compounded for resistance to oil, heat and cold. The cut-away view shows the construction and reinforcement provided by a layer of uniformly braided tough rayon cord that also adds greater flexibility under working conditions. Recommended working temperatures are -40° F. to +200° F. Type 1BSR meets S.A.E. 100R6 specifications.

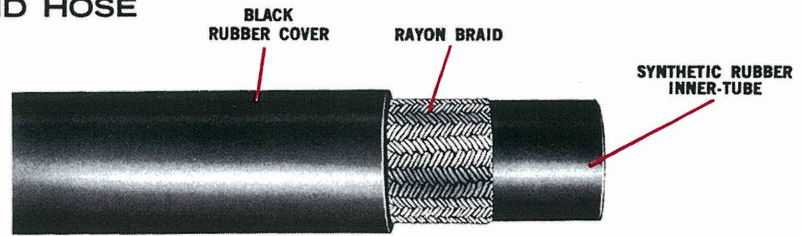

PART NO.	HOSE I.D.	HOSE O.D.	RECOMMENDED WORKING PRESSURE P.S.I.	MIN. BURST PRESSURE P.S.I.	MIN. BEND RADIUS	APPROX. WT. PER 100 FT.	USE WITH FOLLOWING FITTING SERIES
3/8 1BSR	3/8	3/8	500	2000	2 1/2	9.0	95 Series
1/4 1BSR	1/4	1/2	400	1600	2 1/2	11.0	99 Series
5/8 1BSR	5/8	5/8	400	1600	3"	12.0	106 Series
3/4 1BSR	3/4	3/4	400	1600	3"	14.0	112 Series

TYPE 2BSR • 2 RAYON BRAID HOSE


Lenz Type 2BSR, industrial low pressure hydraulic 2 Rayon Braid hose is made of synthetic rubber tube and cover that is compounded for resistance to oil, heat and cold. As shown in the cut-away view it is reinforced with two layers of tough rayon cord, uniformly braided for greater flexibility under working conditions. Recommended working temperatures are -40° F. to +200° F. Type 2BSR meets S.A.E. 100R3 specifications.

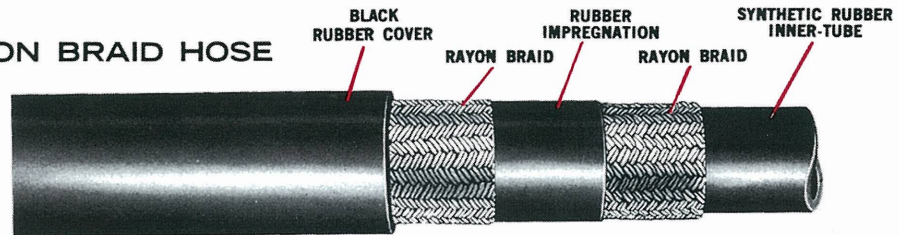

PART NO.	HOSE I.D.	HOSE O.D.	RECOMMENDED WORKING PRESSURE P.S.I.	MIN. BURST PRESSURE P.S.I.	MIN. BEND RADIUS	APPROX. WT. PER 100 FT.	USE WITH FOLLOWING FITTING SERIES
1/4 2BSR	1/4	1 1/2	1250	5000	3"	13.0	98 Series
3/8 2BSR	3/8	3/4	1125	4500	4"	20.0	115 Series
1/2 2BSR	1/2	1 5/8	1000	4000	5"	31.0	206 Series
3/4 2BSR	3/4	1 1/4	750	3000	6"	47.0	217 Series
1" 2BSR	1"	1 1/2	550	2250	8"	60.0	226 Series

1 1/2 FTR MULTI-PURPOSE RAYON BRAID HOSE

1 1/2 Lenz Multi-Purpose Rayon Braid Hose is offered in Type FTR, double rayon braid. As the name implies, this is the hose for many low pressure applications. It is an economical hose for use with air, water, oils, fuels and other common petroleum base fluids. As shown in the cutaway, it has a seamless, oil-resistant synthetic rubber outer cover. The working temperature range is -40° F to +200° F.

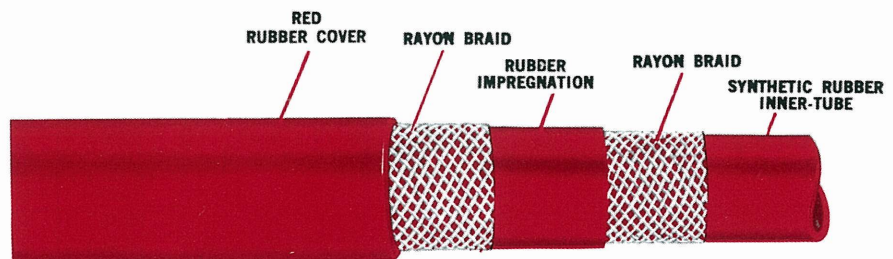

PART NO.	HOSE I.D.	HOSE O.D.	RAYON BRAIDS	REC. WORKING PRESSURE (PSI)	APPROX. WT. PER 100 FT.	USE FOLLOWING FITTINGS SERIES
1 1/2 FTR	1 1/2	2 1/2	2	250	82.0	245 Series