


Particulate Filter F34

= "Most Popular"



Auto Drain



F34-06-000

Features

- Standard Auto. Drain
- Standard 5 Micron Rated Element
- Quick-disconnect Clamp Ring for Easy Bowl Removal
- Bowl Guard

Specifications


Flow Capacity*	1/2	190 SCFM (90.4 dm ³ /s)
	3/4	285 SCFM (134.4 dm ³ /s)
	1	362 SCFM (171.0 dm ³ /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G	1/2, 3/4, 1
Bowl Capacity	16.6 oz	
Standard Filtration	5 Micron	
Weight	6.4 lb. (2.9 kg)	

* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

"F" Series Filters, Type "A" 5 micron elements: All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.

Materials of Construction

Baffle	Acetal	
Body	Zinc	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Deflector	Aluminum	
Element Retainer	Steel Stud	
Filter Element	Polyethylene	
Seals	Plastic Bowl	Nitrile
	Metal Bowl	Fluorocarbon

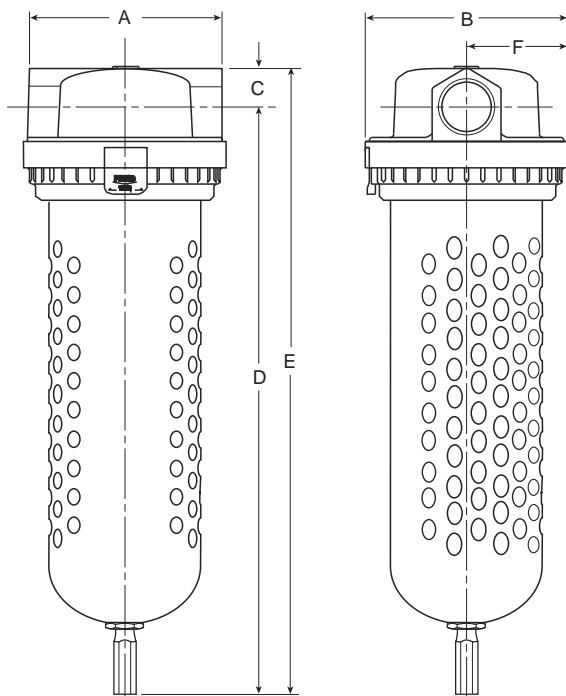

Dimensions

Models	Inches (mm)	A	B	C	D	E	F
Standard Unit (Automatic Drain Standard) F34-XX-000		4.61 (117)	4.80 (122)	.94 (24)	14.04 (356)	14.98 (380)	2.40 (61)
Metal Bowl		4.61 (117)	4.80 (122)	.94 (24)	13.52 (343)	14.46 (367)	2.40 (61)




= "Most Popular"

Replacement Bowl Kits

- Plastic Bowl –
- Bowl Guard, Manual Drain GRP-95-904
- Metal Bowl –
- Includes Auto Drain Assembly GRP-95-905

Replacement Element Kits

- Type "A", 5 Micron FRP-95-209

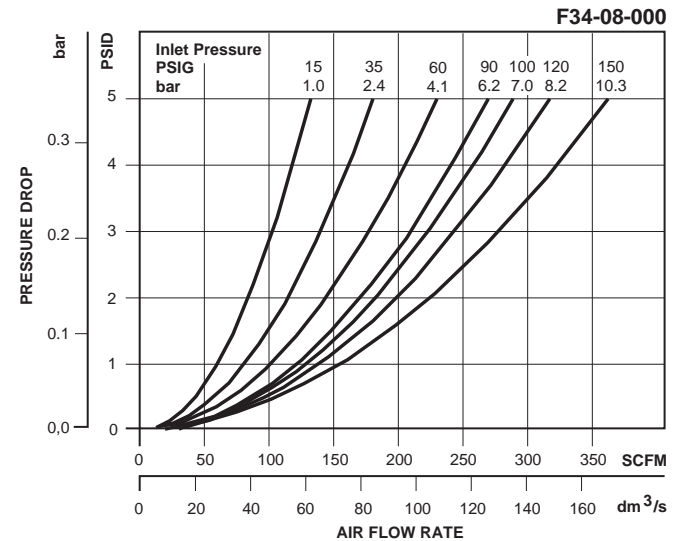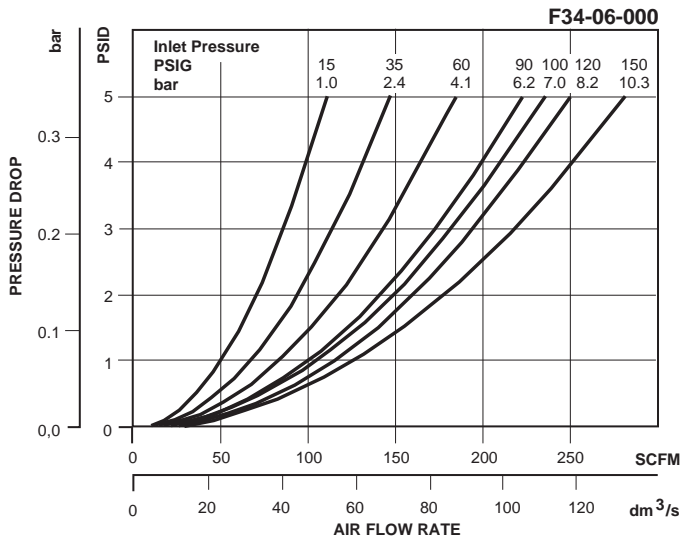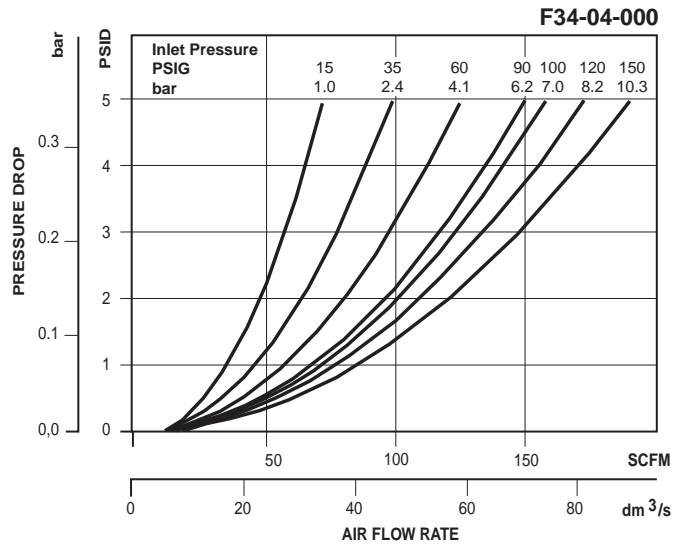

B
Filters, Regulators, Lubricators

Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard	Metal Bowl
Automatic Drain	1/2	F34-04-000	F34-04-M00
	3/4	F34-06-000	F34-06-M00
	1	F34-08-000	F34-08-M00

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.