


# AVAILABLE FITTING ENDS-TYPES

## TAPERED PIPE THREAD

### S.A.E. Adjustable Straight Thread "O-Ring" Type End

Size	T Thread	"A"	"H" Hex
2	5/16"-24	19/64"	7/16"
4	7/16"-20	23/64"	9/16"
5	1/2"-20	23/64"	5/8"
6	9/16"-18	25/64"	11/16"
8	3/4"-16	7/16"	7/8"
10	7/8"-14	1/2"	1"
12	1 1/16"-12	19/32"	1 1/4"
14	1 3/16"-12	19/32"	1 3/8"
16	1 5/16"-12	19/32"	1 1/2"
20	1 5/8"-12	19/32"	1 7/8"
24	1 7/8"-12	19/32"	2 1/8"
32	2 1/2"-12	19/32"	2 7/8"

### S.A.E. STRAIGHT THREAD "O-RING" TYPE END (Connectors)



For Use With S.A.E. Internal Thread O-Ring Boss

SPECIFICATIONS


# HYDRAULIC ACCESSORIES

## ( SPECIFICATIONS & IDENTIFICATIONS )

Part No.	Tube O.D.	Center Radius	Wt. LBS.
80-12	3/4"	37/16"	5 1/2
80-14	7/8"	37/16"	5 1/2
80-16	1"	45/16"	6 1/2
80-20	1 1/4"	5 5/8"	7 1/2
80-24	1 1/2"	7 3/16"	16
80-32	2"	8"	16 3/4

### NO. 1880 HYDRAULIC TUBE BENDERS Hand or Motor Operated

The Lenz tube bender is designed for either hand pump or electric or gasoline motor pump. It is extremely easy to handle and operate. Illustration below shows portable pump. . . may be had with gasoline or electric motor.

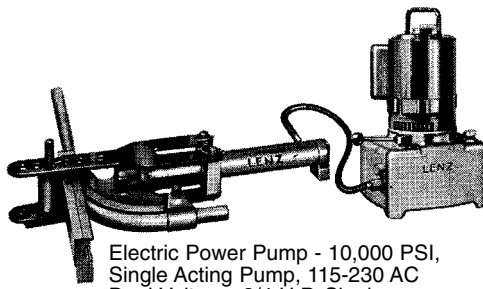


Electric Power Pump - 10,000 PSI, Single Acting Pump, 115-230 AC Dual Voltage, 3/4 H.P. Single Phase, 64 lbs.

Attachments for the Lenz 1880 Hydraulic Tube Bender are shown as Part Numbers in the table above and consist of Radius Shoe, Follow Bar and Saddle.

Illustration above shows hand operated pump.

"Warning Do Not Use Lenz Bender to Bend Aluminum EMT"

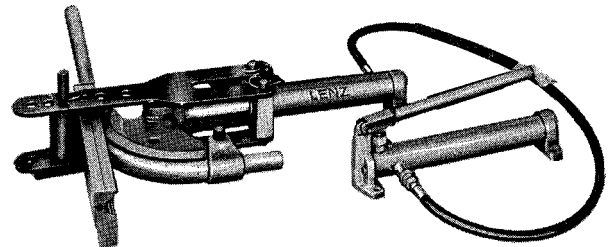

### NO. 412 LENZ TEFLON SEALING TAPE For Sealing Pipe Joints

- 1/2 inch x 520"
- Lasting, Positive Seal
- Crush-proof Spool
- Easier to Handle
- Will Not Unravel
- -250° to + 500° F. Range

Pure Teflon. Use on steam, water acid, alkali, chemical, fuel, corrosives, solvent, ketone, refrigerant gas, plastic, glass, stainless steel, aluminum, brass, and ceramic threads.

