


Diverter Block N18 / N28

 = "Most Popular"



N18-04-0000


Features

- Available in 1/2 (N18) or 3/4 (N28) Threaded Ports
- Two Auxiliary Ports Standard
- Can be Mounted Anywhere in the FRL System

Ordering Information

Model Type	In / Out Port Size	Auxiliary Port Size	Model
N18	1/2	1/4	N18-04-0A00
		3/8	N18-04-0000
		1/2	N18-04-0D00
N28	3/4	3/8	N28-06-0C00
		1/2	N28-06-0000
		3/4	N28-06-0E00

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

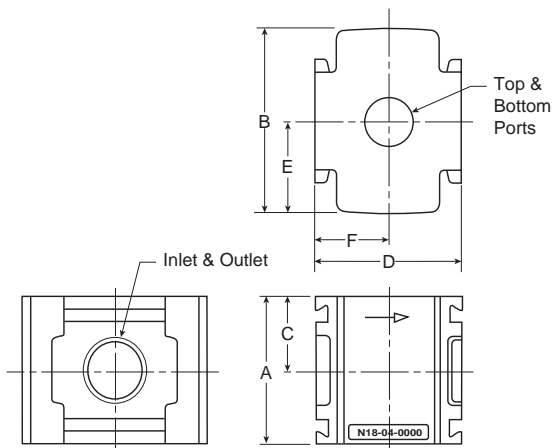

Dimensions

Models	Inches (mm)	A	B	C	D	E	F
Standard Unit N18-XX-0000		1.88 (48)	2.36 (60)	0.94 (24)	1.88 (48)	1.18 (30)	0.94 (24)
Standard Unit N28-XX-0000		1.88 (48)	2.88 (73)	0.94 (24)	2.60 (66)	1.44 (36.5)	1.30 (33)

Specifications

Flow Capacity*	N18 1/2	400 SCFM (189 dm ³ /s)
	N28 3/4	647 SCFM (305 dm ³ /s)
Auxiliary Port (2)	NPT / BSPP-G	N18 3/8
		N28 1/2
Maximum Supply Pressure	300 PSIG (20.7 bar)	
Operating Temperature	32° to 150°F (0° to 65.5°C)	
Port Size (In / Out)	NPT / BSPP-G	N18 1/2
		N28 3/4
Weight	lb. (kg)	N18 .261 (.346)
		N28 .94 (1.08)

* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSID (0.3 bar).

Materials of Construction

Body Aluminum

